

**QUALITATIVE REQUIREMENTS (QRS)/ SPECIFICATION OF
MAHILA POLYCARBONATE SHIELD**

Sl. No.	Name	QR specifications	Trial Directives	
1.	Nomenclature	Mahila Polycarbonate Shield		
2.	Uses	(i) Mahila polycarbonate shield shall be used by Mahila troops during their deployment in riot or riot like situations. It is important protective equipment for Mahila troops when deployed for handling riotous situation. (ii) Polycarbonate shield for Mahila troops has to be light weight with shock absorption capabilities, good quality material and fire resistant for handing crowd with varying degree of hostility. Besides that it must be able to protect the whole body of Mahila from injuries due to impact, blow from blunt objects, brick batting, Lathi blow, stone pelting, projectile/missile, acid bulbs Molotov's cocktails and industrial chemical thrown at her. A standard protective shield is therefore required for Mahila troops.		
3.	Colour	Colourless	To be check by BOO/Line committee	
4.	Transparency	1. Not less than 83% 2. Vision area should be plain for clear vision		
5.	Weight	≤3.0 kg		
6.	Shape	Rectangular curved shape, corrugated vertically for structural strength and stiffness.		
7.	Dimensions	Length		920 mm (±20 mm)
		Breadth (flat)		560mm (±10 mm)
		Breadth (curve)	590mm (±10 mm)	
		Thickness	3mm (Minimum)	
		Arm Strap width	40mm	

[Signature]
MAHENDER SINGH
BSF

[Signature]
Shreshth Kala, AC
SSB

[Signature]
D. Ramesh Kumar
PSO(W) BPRD

[Signature]
Vivek Vaid
IGP, RAF
Chairman

[Signature]
VILRAM, ITC
NSG

[Signature]
NEENAL PASSI
BIS

[Signature]
Shivam Dwivedi
BIS

[Signature]
Chandrashekhara
ITBP, DC/GD


[Signature]
R. S. Palsod
A-145F

[Signature]
D. S. Mishra
NSG, JAR


[Signature]
S. S. D. D. P. S.
Sc F' DIPAS

[Signature]
S. S. D. D. P. S.
DIPAS, DWD

8.	Material	i) The polycarbonate sheet shall be made of high impact resistant/ natural polycarbonate material it may contain additives, processing aids and stabilizers (e.g. UV absorber) ii) The entire fitment should be riveted on reinforced polycarbonate shield. iii) The material used for manufacture of Polycarbonate sheet shall comply with the requirements as per column-3 when tested as per the prescribed IS of column- 4 in the table below :			Certification from any NABL accredited Lab for the test conducted as per IS specified at column-4 with results as per values shown in column-3 (a),(b) , (c), (d) & (e) of the table at SI no 8.
		Sl. No.	Characteristics	Requirement	Method of test, Ref to IS/Annx
		(a)	Melt Flow Index , gram/10 min. (at 300° C under 1.2 Kg load when measured after pre-drying of the material at 120 ± 5°C upto 4 hrs.)	i)1.5 to 8 (for extrusion/ Thermoforming) ii)8 to 15 (for injection moulding)	IS 13360 (Part 4 / Sec 1)
		(b)	Specific Gravity	1.19 to 1.22	IS 13360 (Part 3 Section 1)
		(c)	Flexural Modulus , Min, Mpa (With crosshead speed of 1.2 mm/min and a span to depth ratio of 16 to 1 (test specimen size, 04 mm x 10 mm)	2200	IS 13360 (Part 5 Section 7)
		(d)	Izod Impact Strength , notched , min, kJ/m ² (test specimen thickness of 03 mm and notch radius of 0.25 mm)	60	IS 13360 (Part 5 Section 4)
		(e)	Deflection Temperature under load at 1.82 MPa, Min, °C	120	IS 13360 (Part 6 Section 17)


 Mahender Singh
 DC BSR



 Shreesh Kala, AC
 SSB


 Dr. Ramesh Kumar
 PSD(W) BPRD


 Vivek Vaid
 IGP, RAF
 Chairman


 Vikram Singh
 NSG


 NEELAM
 BIS


 Shirm Dwindi
 BIS


 Chandrashekhara
 ITBP DC/GD


 R. S. Biswas
 AC/UT


 J. S. Mishra
 NOISUB IOAR


 Sh. S. Rana
 Sec 'F' DIPAS


 Dr. L. K. Mehta
 S. I. E)

9.	Polycarbonate sheet characteristics	(i) Poly carbonate sheet formed from the above specified material shall comply with the requirements as per column-3 when tested as per the prescribed IS of Column- 4 in the table below:- <table border="1"> <thead> <tr> <th>Sl. No.</th><th>Characteristics</th><th>Requirement</th><th>Method of test, Ref to IS/Annx</th></tr> <tr> <th>(1)</th><th>(2)</th><th>(3)</th><th>(4)</th></tr> </thead> <tbody> <tr> <td>(a)</td><td>Dart drop Impact, Minimum J (at 27degree C)</td><td>150</td><td>Annx B of IS 14443</td></tr> <tr> <td>(b)</td><td>Light Transmission, percent, Minimum</td><td>83</td><td>IS 13360 (Part -9 Section - 5)</td></tr> <tr> <td>(c)</td><td>Flammability Test (test specimen thickness 3.18 mm + 0.13 mm)</td><td>94 HB class</td><td>IS 13360 (Part – 6 Section – 5)</td></tr> </tbody> </table> (iii) The Poly carbonate body of the Shield shall have abrasion resistance surface coating on both surfaces. (iv) Sheet shall be corrugated (for strength enhancement) except for area defined for higher visibility as per the design specified, with one third of total shield length, in upper extremity.(Refer to figure) (v) At bottom side of the shield there should be tapering of 5cm from both edges with a height of 27cm. (Refer to figure)	Sl. No.	Characteristics	Requirement	Method of test, Ref to IS/Annx	(1)	(2)	(3)	(4)	(a)	Dart drop Impact, Minimum J (at 27degree C)	150	Annx B of IS 14443	(b)	Light Transmission, percent, Minimum	83	IS 13360 (Part -9 Section - 5)	(c)	Flammability Test (test specimen thickness 3.18 mm + 0.13 mm)	94 HB class	IS 13360 (Part – 6 Section – 5)	Certification from any NABL accredited Lab for the test conducted as per IS specified at column -4 with results as per values shown in column – 3 (a), (b), (c), (d) & (e) of the table at the SI no. 9
Sl. No.	Characteristics	Requirement	Method of test, Ref to IS/Annx																				
(1)	(2)	(3)	(4)																				
(a)	Dart drop Impact, Minimum J (at 27degree C)	150	Annx B of IS 14443																				
(b)	Light Transmission, percent, Minimum	83	IS 13360 (Part -9 Section - 5)																				
(c)	Flammability Test (test specimen thickness 3.18 mm + 0.13 mm)	94 HB class	IS 13360 (Part – 6 Section – 5)																				

[Signature]
Mehar Singh
DC BIL

[Signature]
Shreshth Kala, AC
SSB

[Signature]
Anvesh Kumar
PSO (W) BPRD

[Signature]
Vivek Vaid
IGP, RAF
Chairman

[Signature]
Vikram, TC
NSA

[Signature]
MEENAL PASTI
BS

[Signature]
Shivam Dwivedi

[Signature]
Chandra Shekhar
IIBR DQGD

[Signature]
R. S. Bawa
Acting

[Signature]
DD MISHRA
NOISW LOAR

[Signature]
Dr. Shikhar
Self DIPAS

[Signature]
Dr. L. K. Jha
SCE

10.	Handle/Arm Rest Characteristics	i) Cushioned arm rest shall be provided for comfort during long time use. Same should be covered by the cotton cloth. ii) Grips and supports must allow the user to comfortably hold and position the polycarbonate protective shield. iii) The rectangular cushioned arm rest has following dimension: <table><tr><td>Length</td><td>18 inches</td></tr><tr><td>Width</td><td>6 inches</td></tr><tr><td>Thickness</td><td>20 mm</td></tr></table> iv) General requirement of handle:- (a) Manufacturing process for handle should be =Gas-Assisted Injection Moulding (GAIM). (b) Material for handle should be polymeric, preferably polycarbonate (c) Elastomeric bushed and washer system to be used for nut and bolt system.	Length	18 inches	Width	6 inches	Thickness	20 mm	To be check by BOO/Line committee.
Length	18 inches								
Width	6 inches								
Thickness	20 mm								
11.	Performance requirements of PC shield	(a) Resistance to vandalism:- (i) Pc shield is to provide complete protection against brick batting, stone pelting, iron rod and cane attack. (ii) The polycarbonate body of shield shall have impact resistance of level"A3" when tested for vandal resistance as per the method prescribed in Annex of IS14443. (b) Resistance to surface penetration: The polycarbonate body of the shield shall have resistance of level'B3' against penetration when tested for resistance to forced entry as per the test method prescribed in Annex of IS1443 (c) Resistance to surface Abrasion: The resistance of polycarbonate shield to surface abrasion shall be tested in accordance with ASTM D 1044 for 100 cycles under 500g load. Haze of test specimen shall not be more than 20percent (d) Resistance to Environmental Stress Cracking: Environment Stress cracking Resistance(ESCR) Test shall be performed on polycarbonate body of the shield (with protective coating)by constant strain method as per IS 13360(Part8/Sec9)	Certification from any NABL accredited LAB for the test prescribed in Annex C of IS 14443 Certification from any NABL accredited LAB for the test prescribed in Annex D of IS 14443 Certification from any NABL accredited LAB for the test prescribed in ASTM D1044 Certification from any NABL accredited LAB						

Mahendra Singh
DC BSR

Shreesh Kala, Ac
SSB

Jamesh...
PSO(W) BPRD

Vivek Vaid
IGP, RAF
Chairman

Vikram TC
NSG

NEENAL PASSI
BIS

Shirish Divedi
BIS

Chandra Shelkar
IT-B.P. DC/GD

R.S. Bhat
ACB/CSJ

Shreshth
B.P. Mishra
No/sub LOAR

Dr. Shubh...
SC/F/DIPAS

S. L. KARTI
S.C.E.

12	Shelf life	Six (6) years (minimum)	
13	Miscellaneous	(i) Two clutchers on each side (both left and right) to be placed on inside surface of shield for holding lathi. (ii) A strap should be given for hanging shield from backside. (iii) The shield should be amphidextrous (as per the design specified) such that it is user friendly for the left handed as well as the right handed individuals. (iv) Female insignia nearby handle shall be provided as marking for being identified as Mahila PC shield.	To be check by BOO/Line committee

[Signature]
11/17/22
Mahesh D. Dixit
AC BIC

[Signature]
11/09/22
Shreesha Kala, AC
SSB

[Signature]
Anwesha Karm
PSO (W) BPRD

[Signature]
11/11/22
Vivek Vaid
IGP, RAF
Chairman
[Signature]

[Signature]
11/17/22
Vijayam TC
NSG

[Signature]
NEENA PASSI
BIS

[Signature]
Shivam Dastvedi
BIS

[Signature]
Chandra Shekhar
IIBP, DCGD

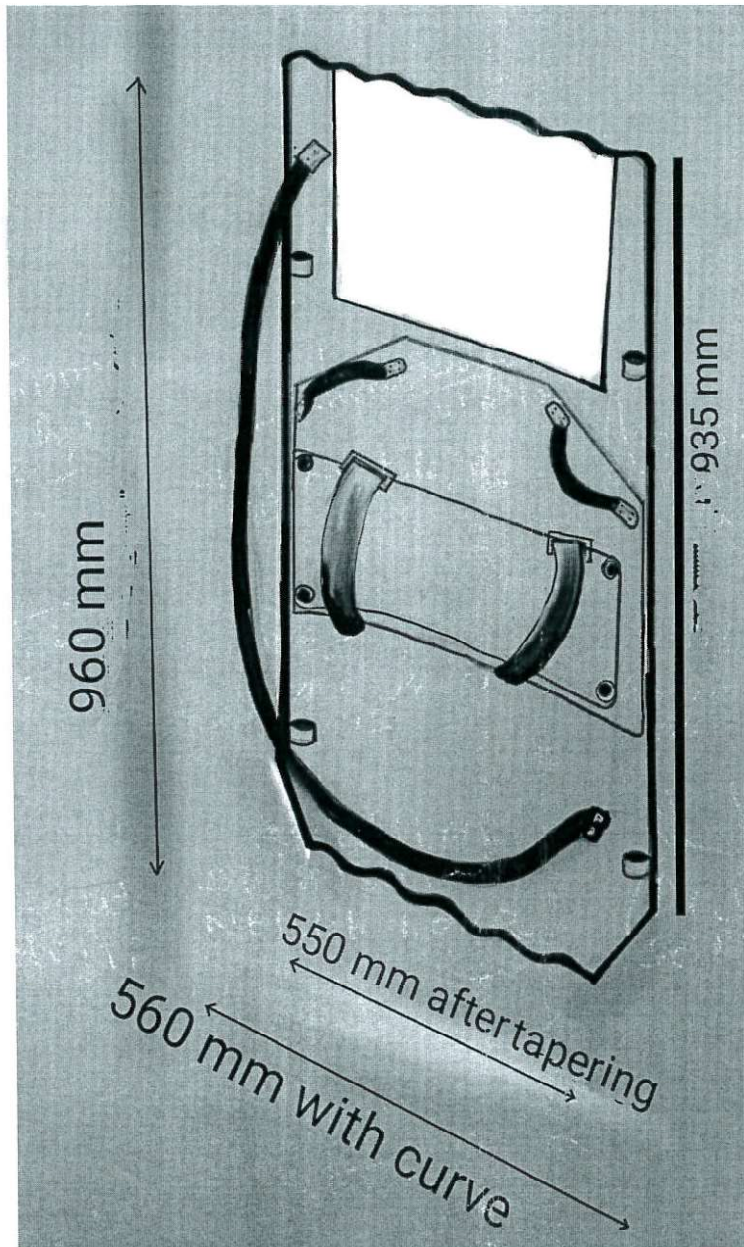
[Signature]
R. S. P. S. S. S.
A. C. S. F.

[Signature]
JP Mishra
N. B. S. B. L. O. A. R.

[Signature]
Dr. Sh. S. S. S.
S. C. F. D. I. P. A. S.

[Signature]
S. L. S. S. S. S.
S. C. F. D. I. P. A. S.

MAHILA POLYCARBONATE SHIELD



[Signature]
11/11/22
Mehar Singh
BSF DC

[Signature]
11/09/22
Shreshth Kala, AC
SSB

[Signature]
Dr. Ramesh Kumar
PSO(W) BPRD

[Signature]
Vivek Vaid
IGP, RAF
Chairman
[Signature]

[Signature]
11/11/22
Vijay Kumar, IC
INSG

[Signature]
MEENAL PASHI
BIS

[Signature]
Shyam Dutt
BIS

[Signature]
Chandra Shekhar
LTBP DC/GD.

[Signature]
R. S. Datta
AC/BSF

[Signature]
D. P. Mishra
Nolsuo LOAR

[Signature]
D. Shri Ram
SC 'F' DIPAS

[Signature]
Dr. L. R. Vaid
SCE